


# RM2

## MANUAL RAMP



|                                      | 32829Axx 1000x800 | 32829Bxx 1000x1100 | 32829Cxx 920x800 | 32829Exx 920x920 | 32829Fxx 1000x800 | 32829Jxx 800x920 |
|--------------------------------------|-------------------|--------------------|------------------|------------------|-------------------|------------------|
| A Total width zone of fixed platform | 1058 mm           | 1058 mm            | 978 mm           | 978 mm           | 1058 mm           | 856 mm           |
| B Total lenght zone of fixed         | 827 mm            | 1130 mm            | 827 mm           | 947 mm           | 827 mm            | 947 mm           |
| C Total height of ramp               | 20,1 mm           | 20,1 mm            | 20,1 mm          | 20,1 mm          | 20,1 mm           | 19,5 mm          |
| D Total width of mobile platform     | 1000 mm           | 1000 mm            | 922 mm           | 922 mm           | 1000 mm           | 800 mm           |
| E Width without borders              | 881 mm            | 881 mm             | 801 mm           | 801 mm           | 881 mm            | 679 mm           |
| F Useful lenght of mobile platform   | 809 mm            | 1100 mm            | 809 mm           | 928,5 mm         | 809 mm            | 928,5 mm         |
| I Total width of fixed platform      | 1115 mm           | 1115 mm            | 1035 mm          | 1035 mm          | 1115 mm           | 913 mm           |
| J Total length of fixed platform     | 855 mm            | 1155 mm            | 855 mm           | 975 mm           | 855 mm            | 975 mm           |
| * Useful width                       | 881/1000 mm       | 881/1000 mm        | 801/922 mm       | 801/922 mm       | 881/1000 mm       | 800 mm           |

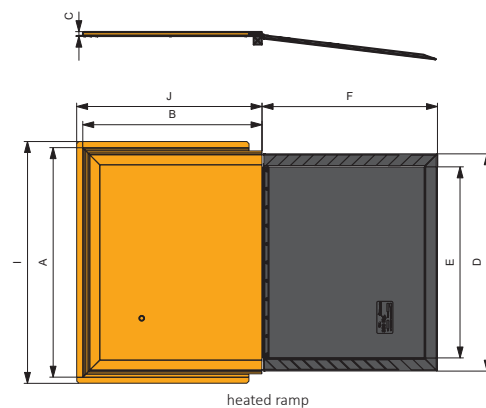

### DESCRIPTION

- Total weight: 28 Kg
- Load: 375 Kg
- Angle aperture: max. 210°
- Easy maintenance.
- Made entirely of aluminium and stainless steel.
- Folding handle with lock.
- Proximity switch for folded ramp signal.
- Non slip surface.
- Vehicles intended for Class I, A.
- Pursuant to regulations R117 and R118.

### ADVANTAGES

- A universal concept of easy installation in all kind of vehicles.
- Mounted in the floor, with a total integration, the RM2 Ramp allows different dimensions, and the personalisation by the client.
- Total integration in floor level, flush-mounted design.