
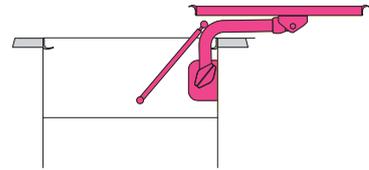


015

OUTWARD OPENING DOOR Pneumatic



DESCRIPTION

- Pneumatic outward-opening door with mechanical latching. Side fixing using vertical system with wedges.
- DM3 pneumatic control, with door open/close function and built-in emergency function.
- Pneumatic emergency using pneumatic buttons or mechanical rotary knob.
- Incorporates vehicle in motion emergency override.
- Sensitisation by microswitches.
- Rubber door seals:
 - Standard version with visible rubber.
 - Optional version with electrical rubber sensor. The outer rubber profile is touch sensitive, so ensuring passenger sensing when closing the door.

ADVANTAGES

- Remote control options permitting centralised closure of all doors (and pneumatic luggage compartment).
- Full safety features of the DM3 pneumatic module.
- Easy maintenance.
- The emergency system allows door opening in under 8 seconds.

TECHNICAL DATA

- Minimum pressure: 6 bar.
- Working temperature: $-30\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- Nominal voltage: $12/24\text{ V} \pm 20\%$
- Complies with regulation UN R107.
- For Class III vehicles.