

KS7u

WHEELCHAIR LIFT



Easy installation

- No need of hydraulic or pneumatic installation. Pump is integrated in the cassette, allowing a plug-and-play easy connection.
- Easy operation by means of a hand-held control.

Safety

- Detector of unfolded handrails.
- High protective handrails.
- Automatic inner rollstop (bridging device)
- Automatic hydraulic outer barrier, for maximal security.
- All movements can be manually operated, in case of lack of supply.

Characteristics

Hydraulic cassette lift for motorcoaches.

Automatic barriers / manual handrails.


Trunk version.

Two models adaptable to different heights.

Minimal space requirement.

2 years or 10.000 cycles warranty (see service manual for details)

Optional: threshold warning system through acoustic and lighting alert.

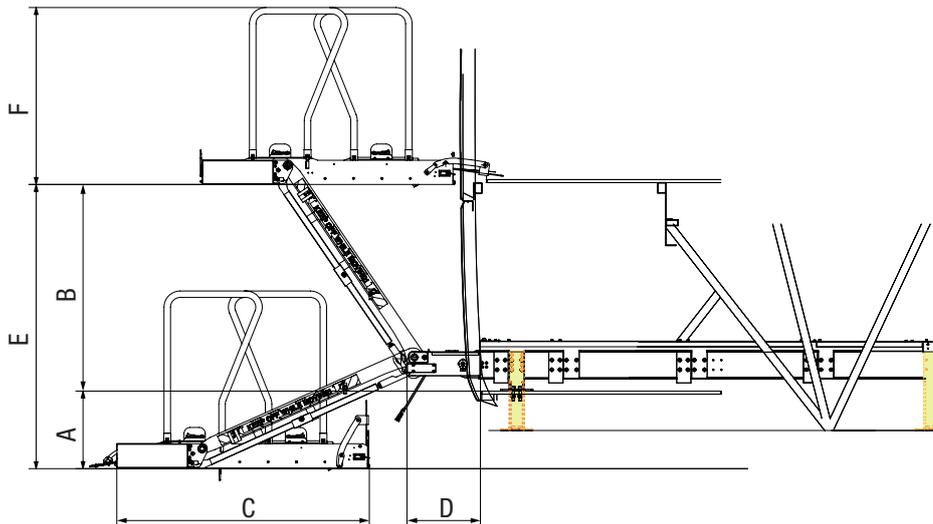

Inches (Milimeters)

Vehicle height	LIFT WEIGHT	CASSETTE MEASUREMENT	A	B	C	D	E	F
3.50	956,80Lb 434Kg	91.53 x 46.88 x 8.66 (2325 x 1191 x 220)	up to 26.77 (680)	40.55 (1030)	48.66(1236)	14.52 (369)	55.70 (1415)	34.44 (875)
3.70				47.79 (1214)			61.06 (1551)	



lift control

Technical characteristics

- Maximal load: 272 kg (600 lb)
- High resistance steel.
- Power supply: 24v / max 50 A.
- According to Regulations: NHTSA 403/404 Compliant
DOT_Public Use